






SPECIFICATION




RATING	: 16A 125VAC , 16A 250VAC (UL,C-UL) 16(4)A 250V~ T85 (ENEC)
INSULATION RESISTANCE	: DC 500V 100MΩ OR MORE
CONTACT RESISTANCE	: DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE	: AC 1500V FOR 1 Min
AMBIENT TEMPERATURE	: 0 °C TO 85 °C
ELECTRICAL LIFE	: 10,000 CYCLES


306X SERIES



TERMINAL



1/4" SLIP-ON THICK0.8



MOUNTING HOLE
(FOR REFERENCE)
PANEL THICK:0.6~3.2


HOW TO ORDER

306 - - - - - - -


SWITCH FUNCTION

3061	: ON-ON
3061B	: OFF-ON
3062	: ON-ON
3063	: ON-OFF-ON
3064	: OFF-(ON)
3065	: (ON)-ON
3066	: (ON)-OFF-(ON)
3067	: ON-OFF-(ON)
3068	: ON-ON-ON

KNOB

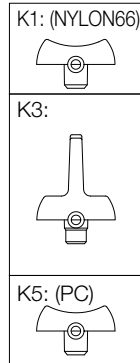

PRINT

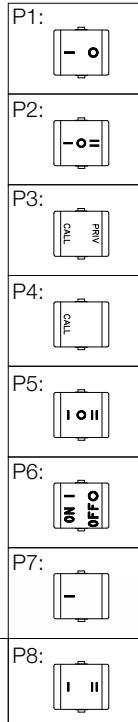

LIGHT

L0:	NONE
L3:	GREEN NEON LAMP
L4:	YELLOW NEON LAMP
L5:	(L4x2pcs) YELLOW NEON LAMP

KNOB COLOR

BK:	BLACK
RD:	RED
WT:	WHIT

BODY COLOR

BK:	BLACK
WT:	WHIT

CIRCUIT

NONE:	DPDT
S:	SPDT