



## 8211 SERIES

# SPECIFICATION





RATING	: 1A 250V- $\mu$ T55 (ENEC)
INSULATION RESISTANCE	: DC 500V 100M $\Omega$ OR MORE
CONTACT RESISTANCE	: DC 2-4V 1A 100m $\Omega$ OR LESS
WITHSTAND VOLTAGE	: AC 1500V FOR 1 Min
AMBIENT TEMPERATURE	: 0 °C TO 55 °C
ELECTRICAL LIFE	: 10,000 CYCLES

A=FULL TRAVEL POSITION:7.0

B=TERMINALS No.2 & No.4 AT "ON" POSITION:MIN. 14.05  $\pm$ 0.5

C=TERMINALS No.1 & No.3 AT "ON" POSITION:17.5  $\pm$ 0.5

\* FREE POSITION:17.5  $\pm$ 0.5

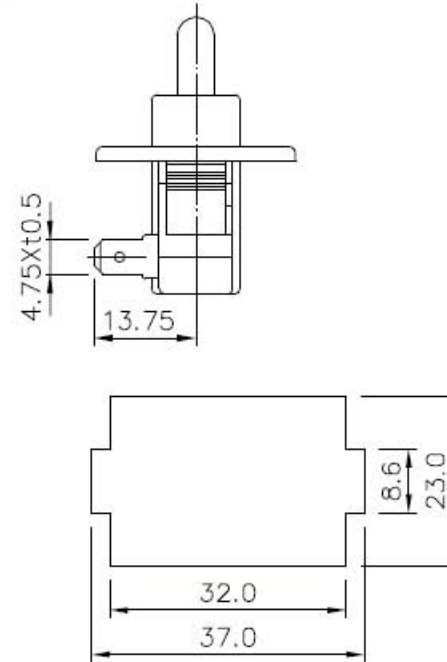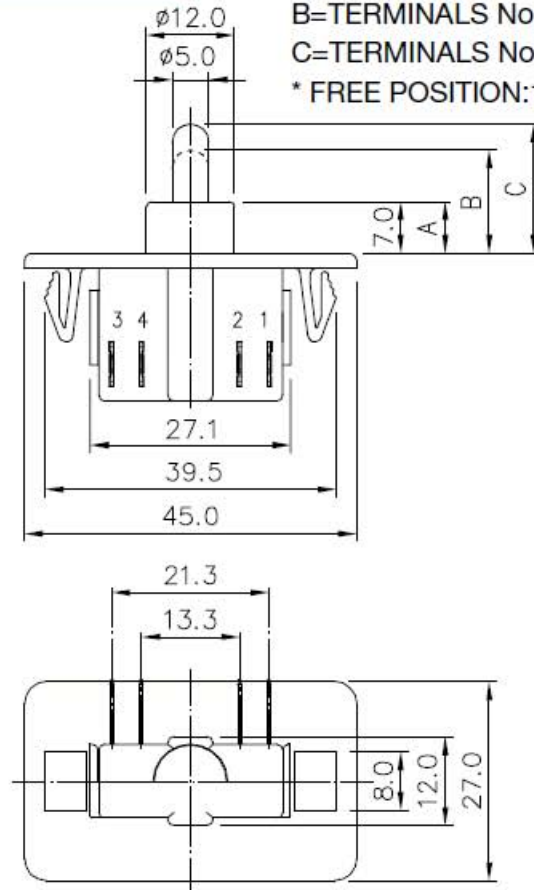

MOUNTING HOLE  
(FOR REFERENCE)