




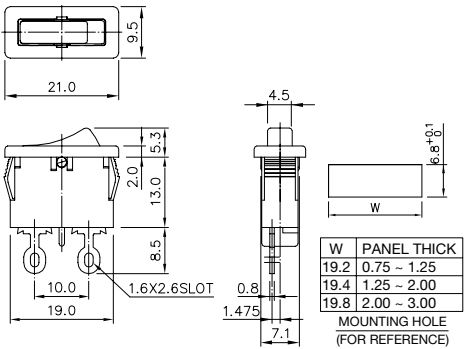

SPECIFICATION

RATING:	12(4)A 250V~ T85, 8/128A 250V~ T85(UL,CUL,ENEC)
INSULATION RESISTANCE:	DC 500V 100MΩ OR MORE
CONTACT RESISTANCE:	DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE:	AC 1500V FOR 1 Min
AMBIENT TEMPERATURE:	0~85°C
ELECTRICAL LIFE:	10,000 CYCLES

SIZE

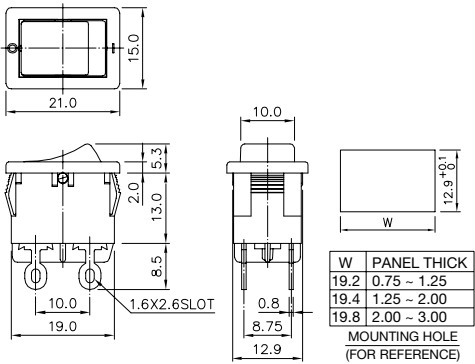

HOW TO ORDER

3026 — ☐ — ☐ — ☐ — ☐ — ☐ — ☐ — ☐ — ☐

KNOB	PRINT	TERMINAL	CIRCUIT	BODY TYPE	KNOB COLOR	BODY COLOR
NONE K5: 	P2: P3: P5: P5A: P5B: 	T1: T2: T3: T4: T4A: 	S: SPST D: DPST	NONE B05: 	BK: BLACK	BK: BLACK