


3048 SERIES

SPECIFICATION



RATING:	6A 125VAC, 6A 250VAC (UL, CUL) 6(4)A 250V~ T85 (ENEC)
INSULATION RESISTANCE:	DC 500V 100MΩ OR MORE
CONTACT RESISTANCE:	DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE:	AC 1500V FOR 1 Min
AMBIENT TEMPERATURE:	0~85°C
ELECTRICAL LIFE:	10,000 CYCLES

SIZE

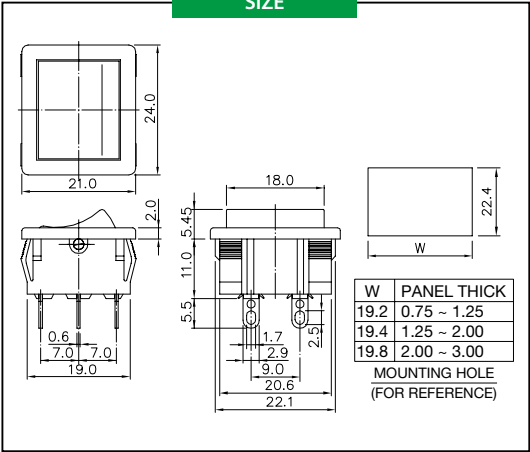

HOW TO ORDER

