


SPECIFICATION



RATING:	16A 125VAC, 16A 250VAC (UL, CUL)
INSULATION RESISTANCE:	DC 500V 100MΩ OR MORE
CONTACT RESISTANCE:	DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE:	AC 1500V FOR 1 Min
AMBIENT TEMPERATURE:	0~85°C
ELECTRICAL LIFE:	6,000 CYCLES

SIZE

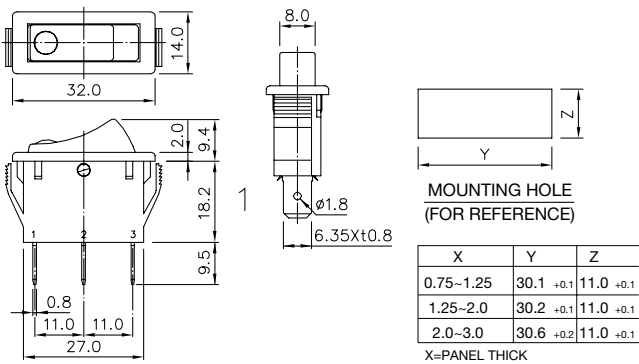

HOW TO ORDER

3073 - ☐ - ☐ - ☐ - ☐ - ☐ - ☐ - ☐ - ☐

KNOB	PRINT	LIGHT	CIRCUIT	TERMINAL	BODY	KNOB / BODY COLOR
K1: PC K2: NYLON66 	P0: NONE P1:  P2:  P3: AMBER COVER P4: RED COVER P5:  ON  OFF P6:  P7:  P8: P4+  P9: P4+  P10: P4+  P11:  P12:  P13:  P14:  P15: 	L2: 125/250V	C01: ON-OFF C02: ON-ON C03: ON-OFF-ON C04: (ON)-OFF-(ON) C04: (ON)-OFF-ON	T1: 6.35x0.8  T2:  T3: 6.35x0.8  T4: 4.75x0.8 	B01: ON-OFF, ON-ON  B02: ON-OFF-ON  B05: ON-OFF, ON-ON 	A: AMBER/BLACK B: BROWN/BROWN C: BLACK/BLACK D: RED/BLACK E: WHITE/WHITE F: AMBER/WHITE G: RED/WHITE H: GREEN/BLACK I: LIGHT BROWN /LIGHT BROWN J: WHITE/BLACK K: GRAY/BLACK L: GRAY/GRAY M: ORANGE/BLACK N: RED/GRAY