


SPECIFICATION



RATING:	16A 125VAC, 16A 250VAC (UL, CUL)
	16(4)A 250V~ T85 (ENEC)
INSULATION RESISTANCE:	DC 500V 100MΩ OR MORE
CONTACT RESISTANCE:	DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE:	AC 1500V FOR 1 Min
AMBIENT TEMPERATURE:	0~85°C
ELECTRICAL LIFE:	10,000 CYCLES

SIZE

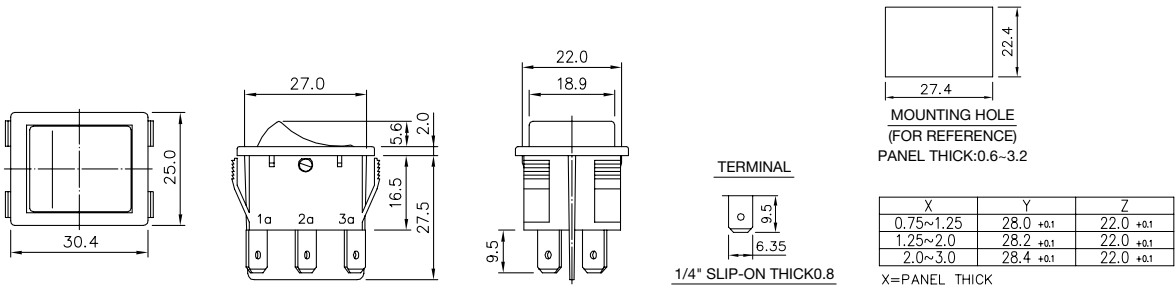

HOW TO ORDER

306X	—	□	—	□	—	□	—	□	—	□	—	□	—	□
SWITCH FUNCTION		KNOB		PRINT		LIGHT		KNOB COLOR		BODY COLOR		CIRCUIT		
3061 : ON-OFF		K1: (NYLON66)		P1:		L0:		BK: BLACK		BK: BLACK		NONE: DPDT		
3061B : OFF-ON						NONE		RD: RED		WT: WHITE		S: SPDT		
3062 : ON-ON		K3:		P2:		L3:								
3063 : ON-OFF-ON						GREEN NEON LAMP								
3065 : (ON)-ON				P3:		L4:								
3066 : (ON)-OFF-(ON)						YELLOW NEON LAMP								
3067 : ON-OFF-(ON)		K5: (PC)		P4:		L5: (L4x2pcs)								
3068 : ON-ON-ON						YELLOW NEON LAMP								
				P5:										
														
				P6:										
														
				P7:										
														
				P9:										
														
				P8:										
														