



SPECIFICATION



RATING:	1/3HP 125/250VAC, 25A 125/250VAC (UL,CUL)
	20.2A 125/250VAC, 30.2A 125/250VAC (UL,CUL)
INSULATION RESISTANCE:	DC 500V 100MΩ OR MORE
CONTACT RESISTANCE:	DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE:	AC 1500V FOR 1 Min
AMBIENT TEMPERATURE:	0~55℃
ELECTRICAL LIFE:	6,000 CYCLES

SIZE

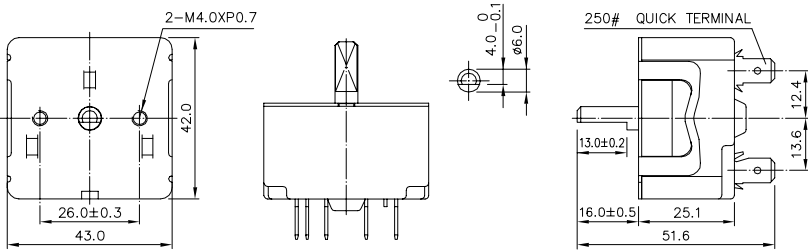

CIRCUIT

