


SPECIFICATION



	22A 125VAC, 10(10)A 250VAC T85 5E4(UL, CUL, ENEC)
RATING:	10A 125VDC~T55 (UL, CUL, ENEC)
INSULATION RESISTANCE:	DC 500V 100MΩ OR MORE
CONTACT RESISTANCE:	DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE:	AC 1500V FOR 1 Min
AMBIENT TEMPERATURE:	0~85°C
ELECTRICAL LIFE:	50,000 CYCLES

SIZE

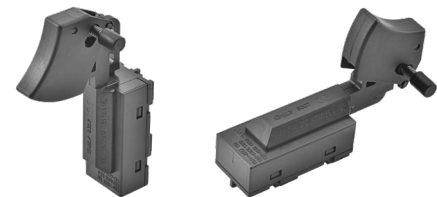