


SPECIFICATION

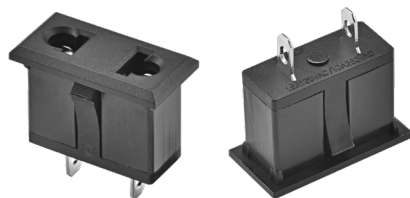





RATING: 15A 125VAC, 10A 250VAC

INSULATION RESISTANCE: DC 500V 100MΩ OR MORE

WITHSTAND VOLTAGE: AC 1500V FOR 1 Min

AMBIENT TEMPERATURE: 0~55°C

SIZE

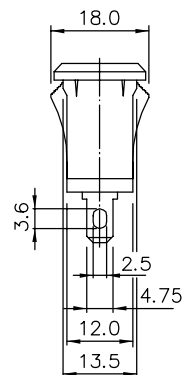

MOUNTING HOLE
(FOR REFERENCE)

PANEL THICKNESS 0.8~2.0 mm