


## SPECIFICATION




RATING:	10A 250VAC
FUSE HOLDER:	MAX.10A/2.5W 250VAC
INSULATION RESISTANCE:	DC 500V 100MΩ OR MORE
WITHSTAND VOLTAGE:	AC 1500V FOR 1 Min
AMBIENT TEMPERATURE:	70°C

### BO3A SIZE

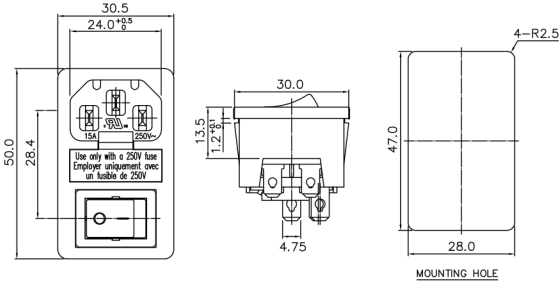

### BO4A SIZE

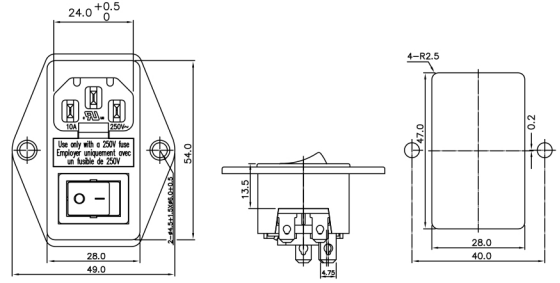

## HOW TO ORDER

3528

### FUSE HOLDER

A0: NONE	
A1:	

### TERMINAL

T3: 4.75x0.8	
T5: 6.35x0.8	
T7: 2.8x0.8	
T9: 4.75x0.8	
T11:	

### CIRCUIT

C01: 3 PIN 3P
C02: 2 PIN 2P
C03: 3 PIN 5P
C04: 2 PIN 4P

### BODY

B03: SNAP IN	B05: SNAP IN
SNAP IN B03B=1.0mm B03D=1.5mm B03C=2.0mm	SNAP IN B05B=1.0mm B05D=1.5mm B05C=2.0mm
B04: SCREW	B06: SCREW
B04A: SCREW	B06A: SCREW

### SWITCH

S: WITH SWITCH