


SPECIFICATION




RATING:	10A 250VAC
FUSE HOLDER:	☐ MAX.10A/2*2.5W 250VAC
INSULATION RESISTANCE:	DC 500V 100MΩ OR MORE
WITHSTAND VOLTAGE:	AC 1500V FOR 1 Min
AMBIENT TEMPERATURE:	70°C

B01

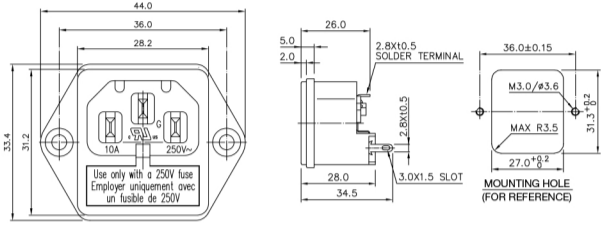

B01A

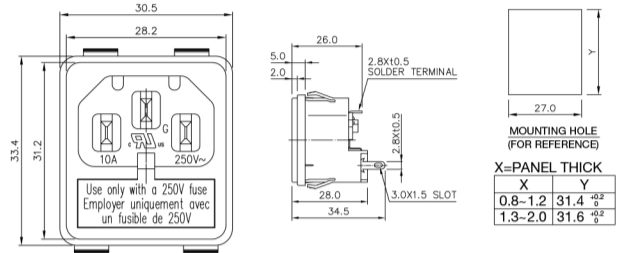

HOW TO ORDER

3545 - ☐ - ☐ - ☐

TERMINAL

T1: 2.8xt0.5 EARTH	
T1A: 2.8xt0.5 EARTH	
T1B: 2.8xt0.5 EARTH	
T1D: 4.75xt0.8 EARTH	
T1E: 4.75xt0.8 EARTH	

BODY

B01: SCREW	B01B: SCREW
B02: SCREW	B02B: SCREW
B01A: SNAP IN	B01C: SNAP IN
B02A: SNAP IN	B02C: SNAP IN

SWITCH

S: WITH SWITCH