


SPECIFICATION



RATING:	10A 250VAC
FUSE HOLDER:	— MAX.10A/2*2.5W 250VAC
INSULATION RESISTANCE:	DC 500V 100MΩ OR MORE
WITHSTAND VOLTAGE:	AC 1500V FOR 1 Min
AMBIENT TEMPERATURE:	70°C

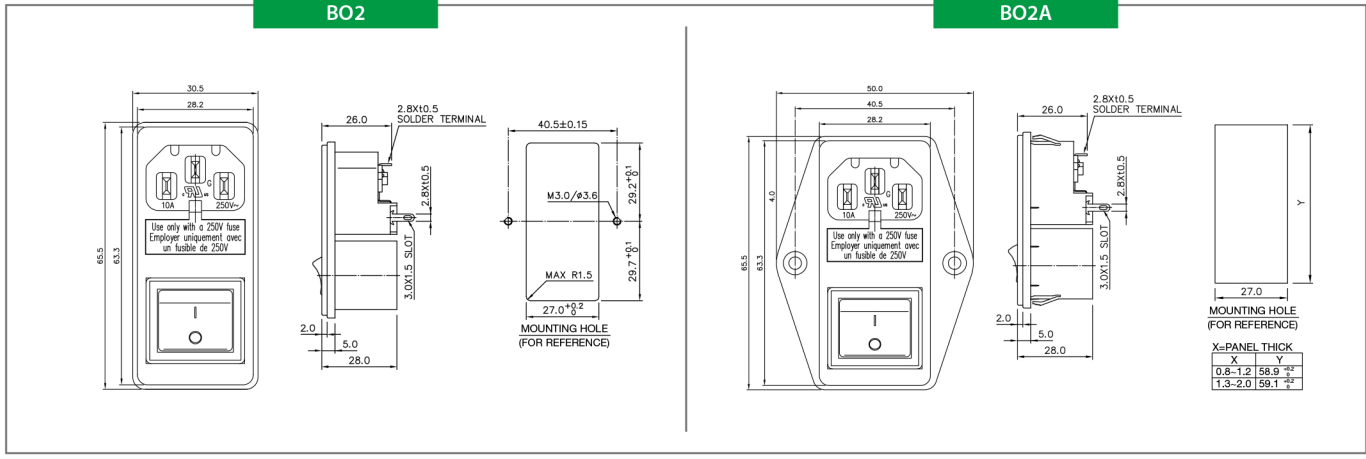

HOW TO ORDER

3545 — □ — □ — □

TERMINAL

T1: 2.8xt0.5 
T1A: 2.8xt0.5 
T1B: 2.8xt0.5 
T1D: 4.75xt0.8 
T1E: 4.75xt0.8 

BODY

B01: SCREW 	B01B: SCREW 
B02: SCREW 	B02B: SCREW 
B01A: SNAP IN 	B01C: SNAP IN 
B02A: SNAP IN 	B02C: SNAP IN 

SWITCH

S: WITH SWITCH