





## SPECIFICATION

c US **UL61058-1** 15

RATING	: 6(4)A 250V~μ T85 (UL,C-UL,ENEC) 4/ 64A 250V~μ T85 (UL,C-UL,ENEC)
INSULATION RESISTANCE	: DC 500V 100MΩ OR MORE
CONTACT RESISTANCE	: DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE	: AC 1500V FOR 1 Min
AMBIENT TEMPERATURE	: 0 °C TO 85 °C
ELECTRICAL LIFE	: 10,000 CYCLES

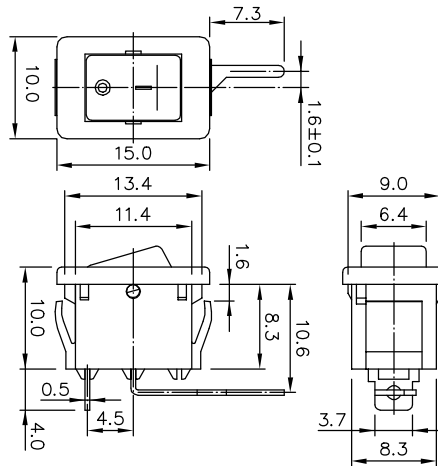

W	PANEL THICK
13.7	1.3~1.5