






**3331  
SERIES**

## SPECIFICATION



RATING	: 10A 125VAC , 5A 250VAC (UL,C-UL,ENEC)
INSULATION RESISTANCE	: DC 500V 100MΩ OR MORE
CONTACT RESISTANCE	: DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE	: AC 1500V FOR 1 Min
AMBIENT TEMPERATURE	: 0 °C TO 55 °C
ELECTRICAL LIFE	: 10,000 CYCLES

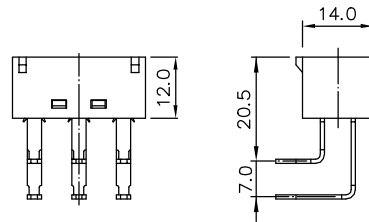

PC MOUNTING  
(FOR REFERENCE)

## HOW TO ORDER

3331 - □ - □ - □ - □ - □ - □

KNOB	RATING		BRACKET	TERMINAL	CIRCUIT	KNOB COLOR
K1: 	P1: 	P7: 	B: 	T1: 	DD: DPDT	BK: BLACK
K2: 	P2: 	P8: 	B2: 2-ø3.3 	T2: 	DS: DPST	RD: RED
K3: 	P3: 	P9: 	B4: 	T3: 	SD: SPDT	
	P4: 	P10: 	B5: 2-M3.0x0.5 	T4: 	SS: SPST	
	P5: 	P11: 				
	P6: 					